


# Astec: Open Loop Type Current Sensor

## Astec Open Loop Type Current Sensors

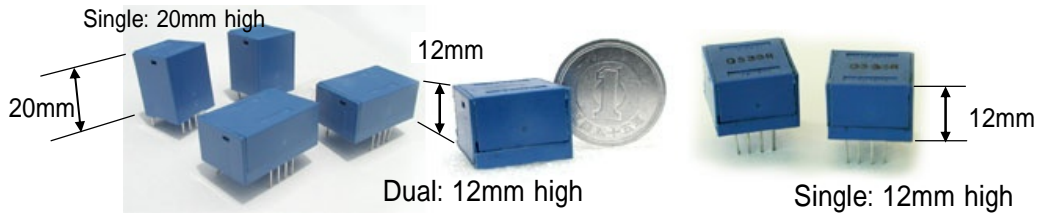

Type: Open Loop Type with Hall Effect, Core Material: Permalloy  
 Rated Current: 1.5A ~ 30A  
 Connection: Mounting on P.C. Board  
 Output: Single or Dual  
 Dimension: Single: Ordinary Type 15 x 15 x 20mm (Hight 20mm), Compact Type 16 x 16 x 12mm (Hight 12mm)  
 Dual: 12 x 26 x 12mm (Hight 12mm)  
 Application Servomotor Driver, AC Variable Speed Motor, DC Motor Driver, Inverter  
 Buttery Power Supply, Robot Arm, Broadcasting System, Chipmounter, Door Movement Control & others.

## Part Numbers for Orders

	<b>Series</b>	D	Single	Output Number
		L	Dual	
	<b>Rated Current</b>	1R5	1.5A	Rated Input Current
		03	3A	
		05	5A	
		10	10A	
15		15A		
20		20A		
30	30A			
<b>Current Polar</b>	R	±	Bipolar Input Current	
	N	+	Unipola Input Current	
<b>Input Voltage</b>	A	± 15V	AC Input Current	
	B	± 12V		
	T	± 5V		
	S	+ 12V	DC Input Current	
	U	+ 5V		
	C	+ 15V		
<b>Property &amp; Size</b> <small>(SCL Series are 12mm high.)</small>	P		Ordinary	
	H		Low Noise	
	E		High Voltage Withstand.	
	S		12mm High	

Please send an E-Mail for further information.

Astec Co., Ltd. (Taiho Products, Co.,Ltd.)  
 Tokyo Sales

E-Mail : taihopro@tohgoku.or.jp  
 E-Mail : m.ogawa-int@parkcity.ne.jp